

HORIZONTAL SHAFT IMPACTOR



TECHINAL DETAILS

Feed opening (W x H)	1440 x 520mm
Max feed size	250mm
For Hard materials	200mm
Rotor Diameter	1250mm
Installed power	160kW
Breaker plate	3 for secondary & tertiary crushing
CAPACITY	80-180tph


DIMENSIONS

Width	2328mm
Length	2825mm
Height	3173mm
Weight	18883kgs approx.


Note- Weight includes basic crusher and motor with anchoring fixings, v-belts for drive, control cabinet, motor support, lubrication station, hydraulic station with piping

The SF1214 HSI features hydraulic frame opening and hoist for easy access to rotor and interior of crusher; high crushing ratio and capacity with large gripping angle, in turn produces less stress on the product for a better shape & quality product. The SF1214 is suitable for a range of applications including secondary and tertiary crushing stage with 3 breaker.

The SF series of impact crushers adopt a special crushing method, with a large crushing ratio, uniform particle size, cube shape, no tension and cracks, and a low proportion of needle-like materials. It can crush ores and various rocks whose high-pressure strength does not exceed 320MPa and whose feed particle size meets the requirements in the technical parameter table. This series of products adopts new technology that effectively prevents the entire impact frame from falling off and prevents the impact liner from colliding with the plate hammer, greatly enhancing the safety of the product.

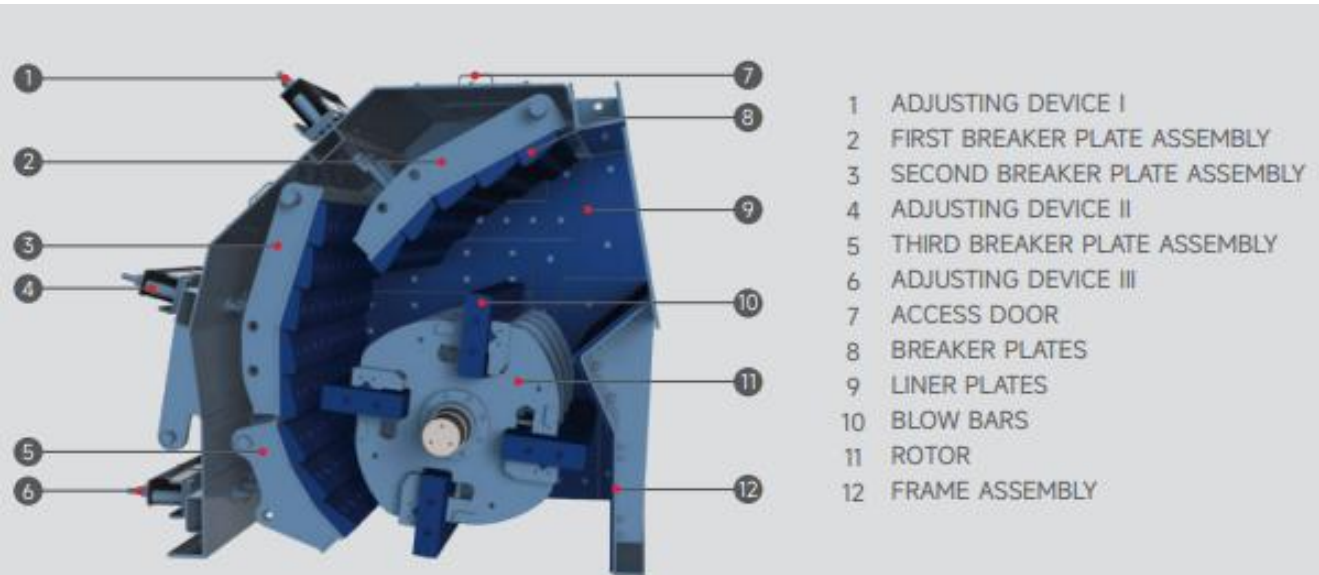


Overall Dimensions

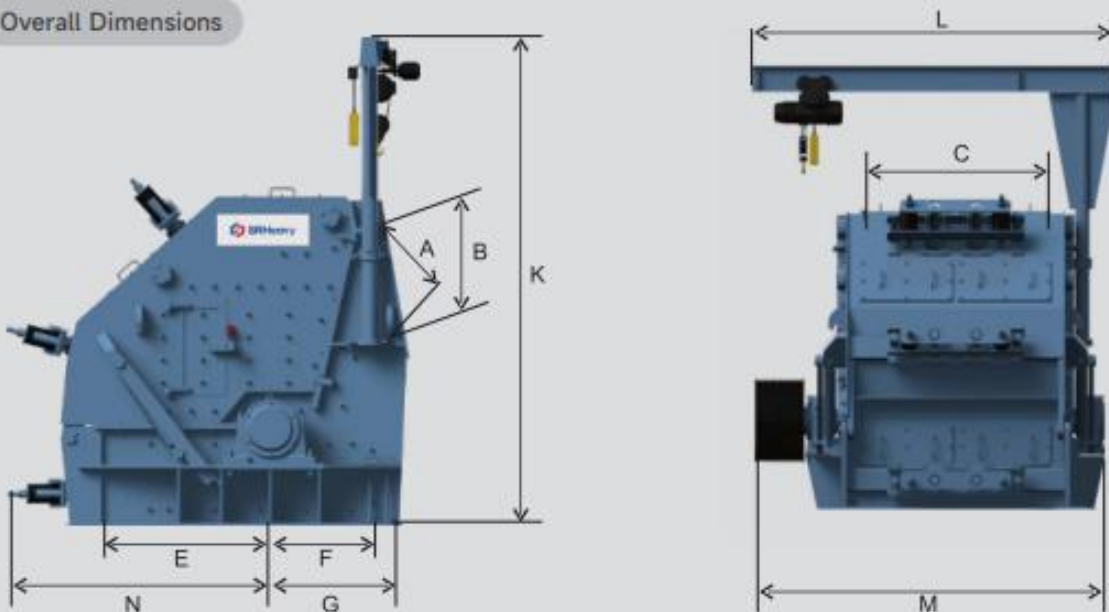

	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	G (mm)	K (mm)	L (mm)	M (mm)	N (mm)	Weight (kg)
--	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	-------------

SF1214	300	520	1440	1180	800	975	3173	2540	2328	1851	18883
--------	-----	-----	------	------	-----	-----	------	------	------	------	-------

21
系列
NEW F

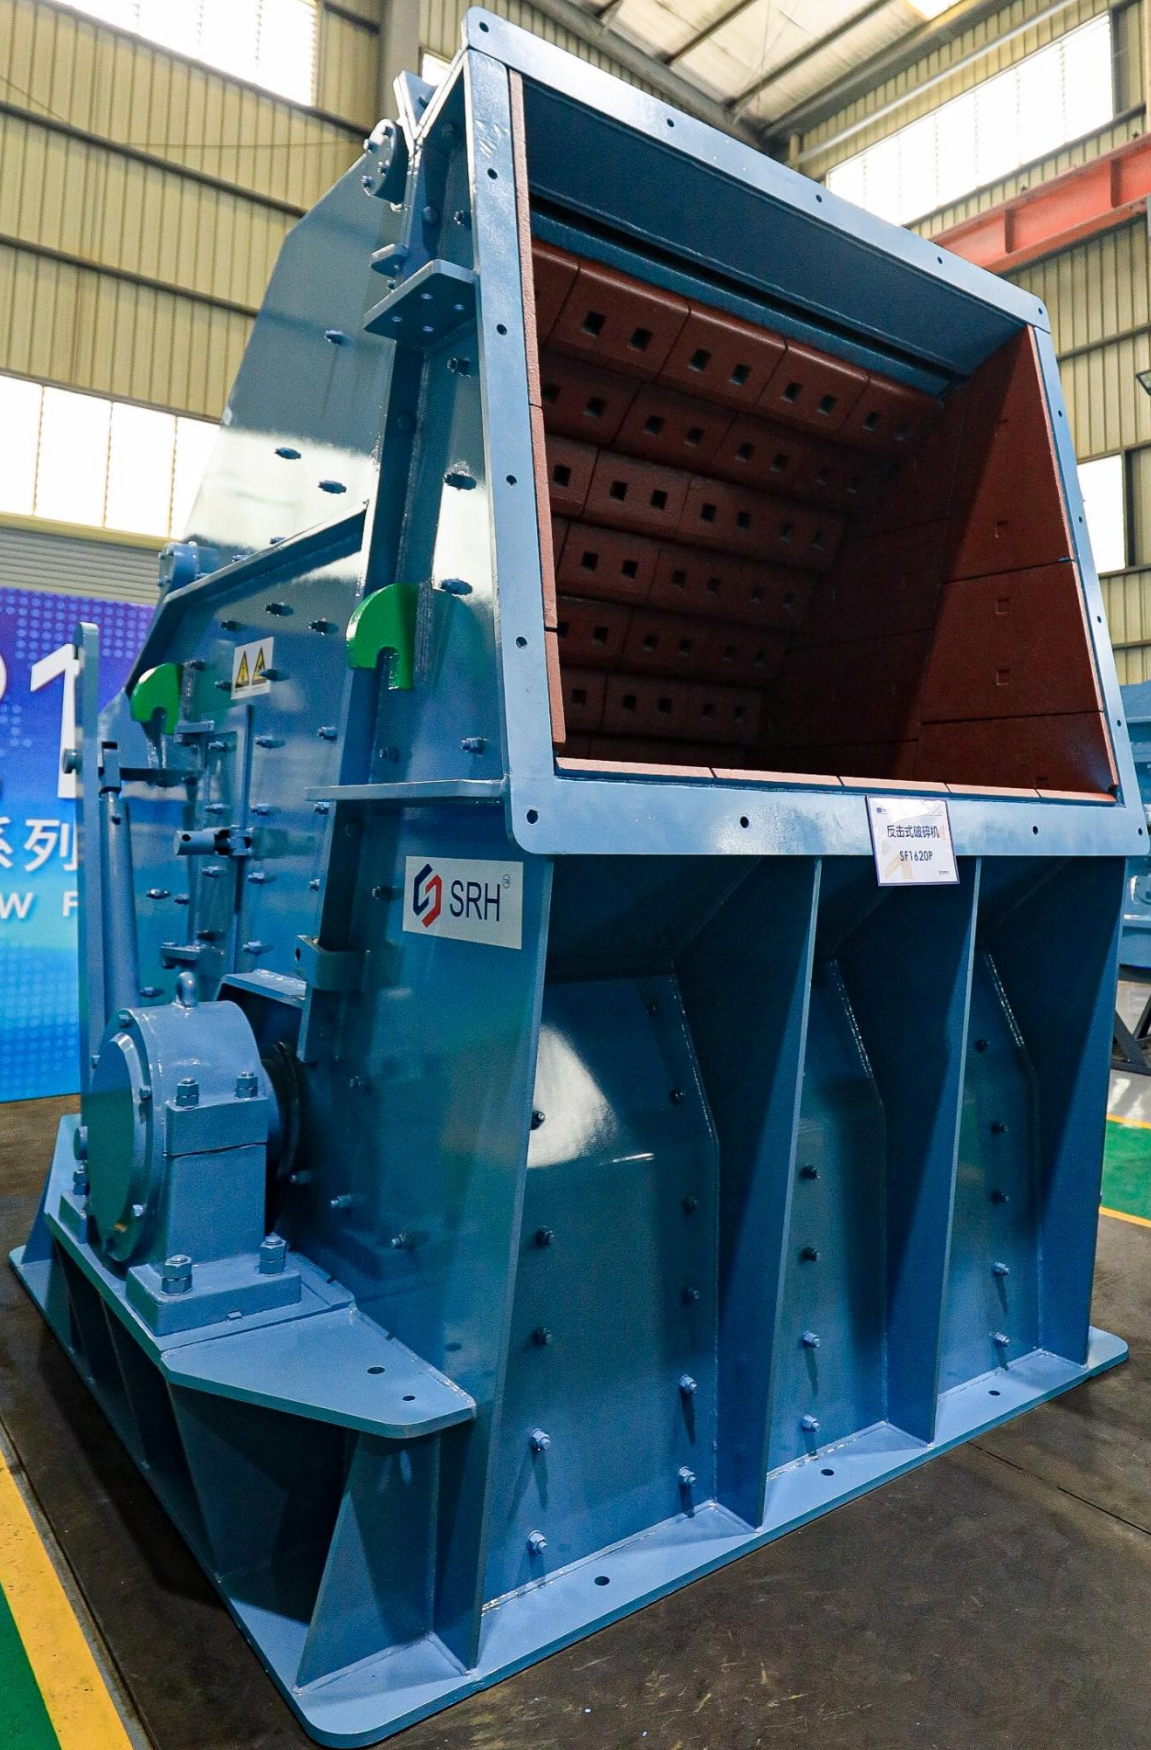

反击式破碎机
SF1420P

